SLA-1000 High-dynamic range low-noise preamplifier

Features

- Wide instantaneous bandwidth
- High dynamic range
- Low-noise
- High intercept

Typical applications

- Wideband signal intelligence systems
- Improving existing receiving systems
- Receiver preamplifier
- Masthead preamplifier
- Laboratory measurement setups

Product description

This low-noise pre-amplifier deliver exceptionally high dynamic range in the receiving and measurements systems. The low noise-figure is coupled with extremely high intermodulation level to reach this goal. The high dynamic range enables to use as a wideband amplifier in a reconnaissance system without overload the input. In this way up to 6-8 dB sensitivity improvement could be reach in the system.

The high-gain version could be used to improve the sensitivity of a spectrum analyzer in the laboratory environment, where signal load can be controlled. The high gain and low noise figure makes it useable to set up a noise figure measurement with ordinary spectrum analyzer.

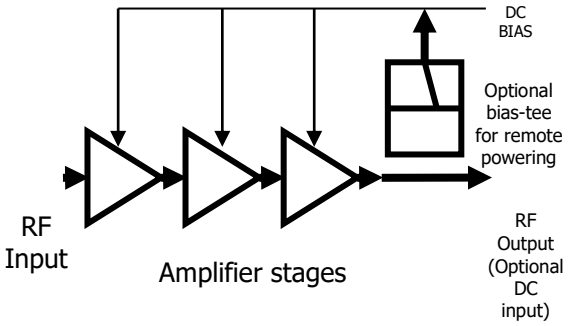

The information contained herein is believed to be accurate and reliable. Sagax assumes no responsibility for inaccuracies or omissions.
Specifications subject to change without prior notice. All Trademarks are the property of their respective owners.

Functional block diagram

Direct		NOISE & GAIN			CALIBRATED
RBW:	1 MHz	RF Atten.	0 dB	2nd Stage Corr.	On
Average:	7	Auto Ref Level	On	Image Rejection	...
		Current Value			
RF:	240 MHz	ENR	15.39 dB	NF.	1.56 dB
LO:	...	Loss In	0 dB	Noise Temp.	125.16 K
IF:	...	Loss Out	20 dB	Gain	32.61 dB

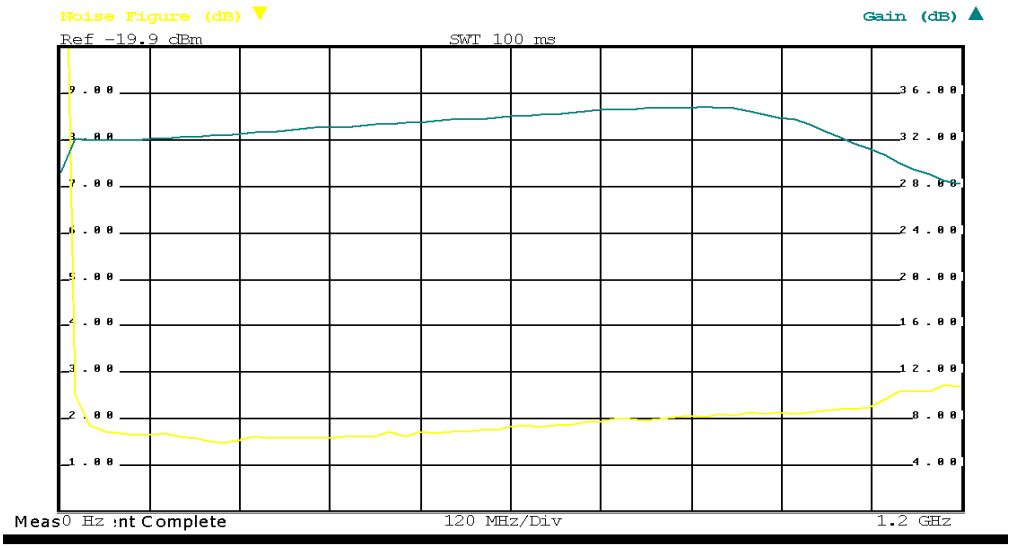

PQRR

Date: 24.MAY.2005 09:40:33

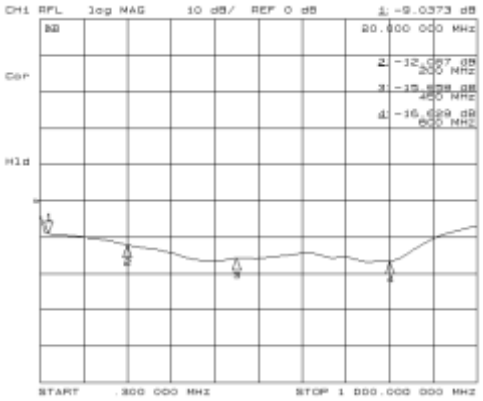

Input return loss

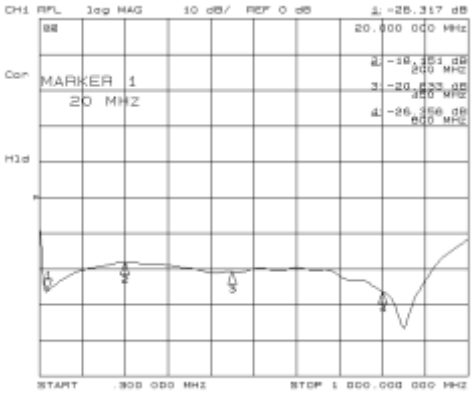

Output return loss

Typical performance

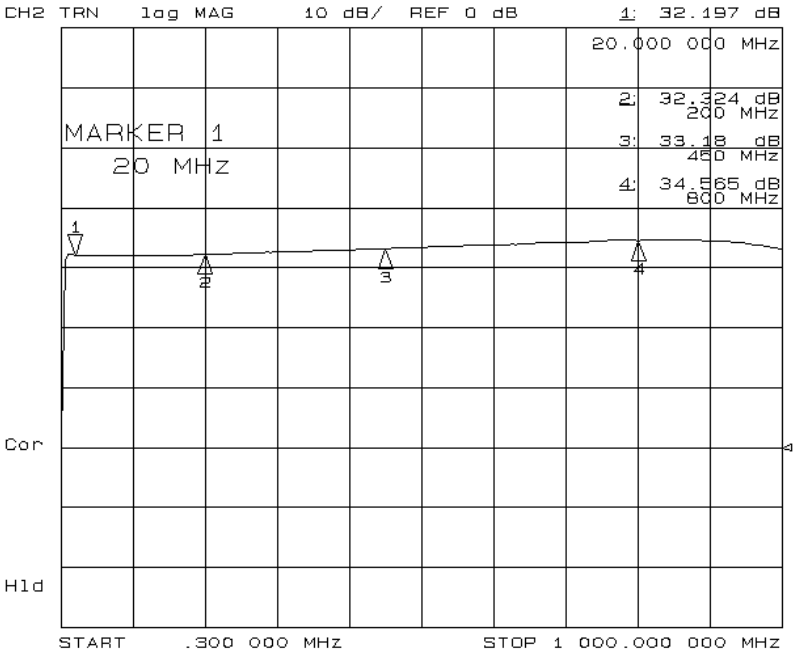

Gain 10dB/

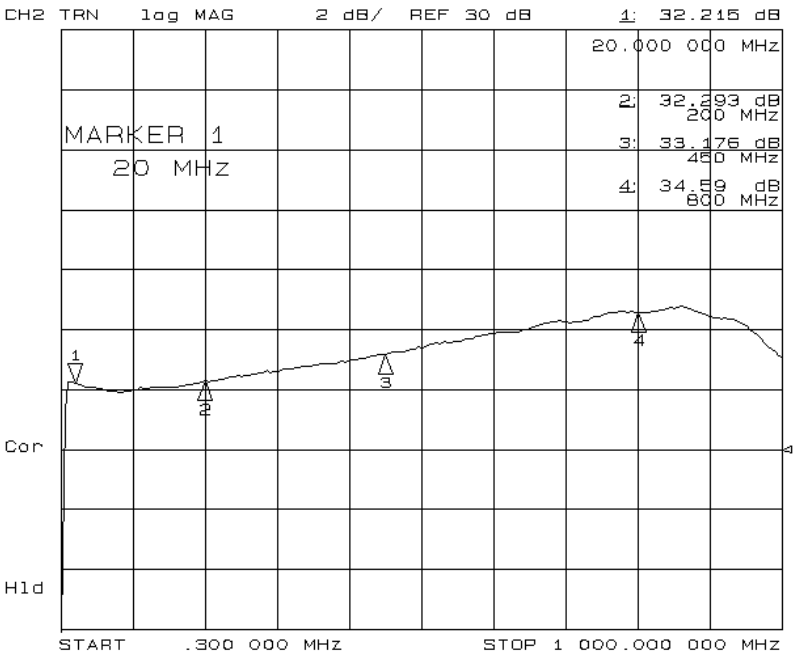

Gain 1dB/

Specification summary

Signal routing data	
Frequency range	20 to 1000 MHz
Gain	
Gain flatness	+/-1 dB typ.
Noise figure	3.2 dB typ.
Output IP3	42 dBm typ.
Output IP2	62 dBm typ.
DC voltage	12V
DC current	190/380/570 mA typ.
Connectors:	
RF	
RF+DC	
Dimensions	
(L×W×H)	90X60X32 mm
Weight	220 gr
Operating temp.	-20 to +55°C